

**Deye**

SAVING YOUR  
ELECTRICITY BILL

More Efficient

More Safe

More Convenient

More Intelligent

# *BALCONY ENERGY STORAGE SOLUTION*

DEYE AUTUMN AE SERIES



## Convenient Charge

Portable Power with  
USB-A and Type C



## Extreme Weather Adaptability

Wide Operating  
Temperature -10°C ~ 50°C



## Long Lifespan

10-year Warranty  
6000 Cycles to 70% Capacity



## High Protection

IP 65  
Water & Dust Protection



## Smart Connection

Bluetooth, Wi-Fi and  
Mobile APP



## Flexible Operation

Support On-grid and  
Off-grid Operation



Model	AE-FS2.0-2H2/7
AC Technical Specification	
Nominal Input / Output Power / UPS Power	1000 / 1000W
AC Input / Output Frequency and Voltage	50Hz ( 45Hz ~ 55Hz ) , 60Hz ( 55Hz ~ 65Hz ) , L / N ( PE ) , 220 / 230 Vac
Grid Type	Single phase
Rated Grid Input / Output Current	4.6A / 4.4A
Max.Grid Input / Output Current	5.0A / 4.8A
Peak Power ( off-grid )	2 times of rated power, 10s
Power Factor Adjustment Range	0.8 leading to 0.8 lagging
Max. bypass Grid to load	10A
DC injection current	THD<3% ( Linear load<1.5% ) mA
DC Technical Specification	
Max. PV Access Power ( W )	2200W
Max. PV Input Power	1600W
Max. PV Input Voltage ( V )	60V
Start-up Voltage ( V )	25
MPPT voltage range ( V )	20 ~ 55
Full Load MPPT Voltage Range ( V )	30 ~ 55
Rated PV Input voltage ( V )	42.5V
Max. Input Short-Circuit Current ( A )	27+27A
Max. Operating PV Input Current ( A )	18+18A
No. of MPP Trackers / No. of Strings per MPP Tracker	2 / 1
Battery Technical Specification	
Battery Chemistry	LiFePO <sub>4</sub>
Battery Nominal Voltage	51.2V
Battery Nominal Energy	2000Wh
Max.Charging/Discharging Current	25A
Battery Operating Voltage	44.8V ~ 57.6V
Battery Cycle Life	≥6,000 ( @25°C±2°C, 0.5C / 0.5C, 70%EOL )
Parallel Capability	Supports up to 4 AE-F2.0 Smart Extra Batteries up to 10kWh
USB Port Technical Specification	
USB-A Output	2ports, 5V, 2.4A, 12W Max per port
USB-C Output	2ports, 5V, 3.0A, 15W Max per port
Other Technical Specification	
Display	Colorful Touch LCD & APP & Battery LED ( SOC, Alarm )
Communication interfaces	Wi-Fi, Bluetooth
Dimension ( W × D × H )	450 × 210 × 321mm
Weight Approximate ( kg )	26Kg
Operating Temperature Range	-10°C ~ 50°C
Max. Operating Altitude	2000m
Relative Humidity	0 ~ 95% ( No Condensing )
Safety EMC / Standard	IEC62619, UN38.3, IEC / EN62109-1, IEC / EN62109-2, IEC / EN61000-6-1, IEC / EN61000-6-2, IEC / EN61000-6-3, IEC / EN61000-6-4
Grid Regulation	VDE4105, IEC61727 / 62116, VDE0126, AS4777.2, CEI0-21, EN50549-1, G98, G99, C10-11, UNE217002, NBR16149 / NBR16150
Battery Certification	UN38.3, IEC 62619
Installation Style	Floor-Mounted
Warranty	5 years





Model		AE-F2.0
Battery Technical Specification		
Battery Chemistry		LiFePO <sub>4</sub>
Battery Nominal Voltage		51.2V
Battery Nominal Energy		2000Wh
Max. Charging / Discharging Current		50A
Battery Operating Voltage		44.8V ~ 57.6V
Battery Cycle Life		≥6000 ( @25°C±2°C, 0.5C / 0.5C, 70%EOL )
Parallel Capability		5 pcs
Other Technical Specification		
Display		LED ( SOC, Alarm )
Communication interfaces		CAN2.0, LoRa
Dimension ( W × D × H )		450 × 210 × 244mm
Weight Approximate ( kg )		20
Operating Temperature Range		-10°C ~ 50°C
Max. Operating Altitude		3000m
Relative Humidity		15% ~ 85% ( No Condensing )
Certification		UN38.3, IEC 62619, CE
Installation Style		Floor-Mounted
Warranty		10 years

\*Maximum 5 Pieces AE-F2.0 Packs in Parallel, Up to 10kWh.






SCENARIO-BASED ENERGY MANAGEMENT SOLUTIONS

Utilize energy in every outdoor adventure or household needs. Embrace effortless energy experience that's both eco-friendly and budget-friendly with our intelligent assistant.


Scenario 1 :



Compact Balcony Solar Plant

Automated Energy-Saving Strategies

Scenario 2 :



Camping Power Solution


Empower Your Outdoor Adventure

Scenario 3 :



Reliable Home Emergency Power Source

Ensure You Stay Powered Up When You Need It Most

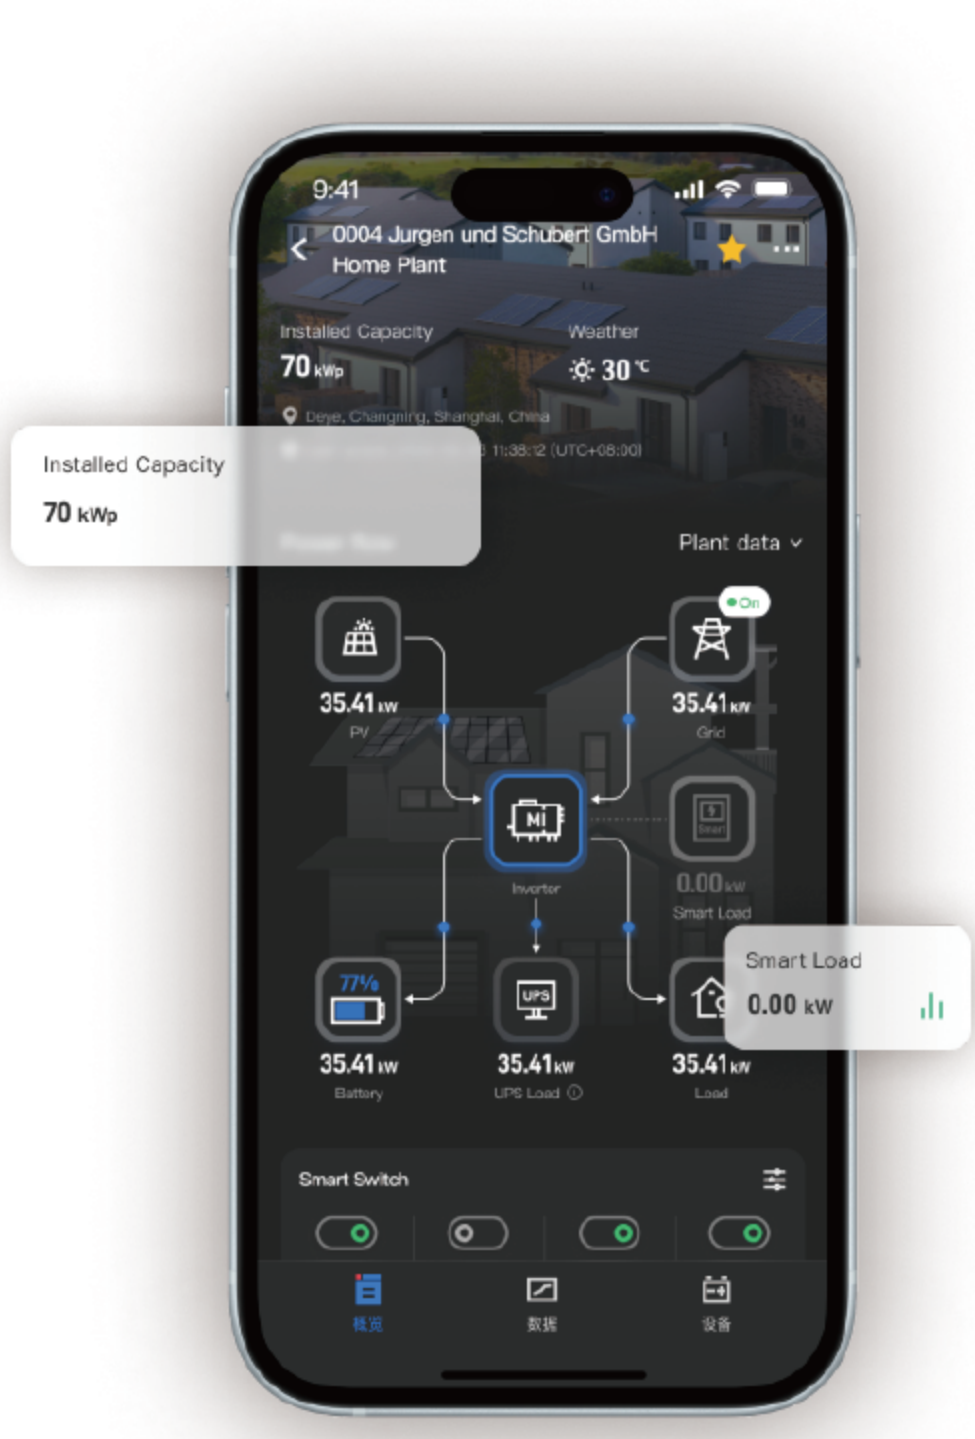

SMARTEN-UP YOUR HOME ENERGY

Real-time monitoring, with data information at a glance.  
Create scenario-based tasks that adapt to your daily routines.  
A smarter way to manage your electricity bills.

CONNECT, MONITOR, CONTROL

Seamlessly integrated with Deye devices for a smarter, more efficient energy experience.

User-friendly interface demystifies complex settings.  
Clear menu hierarchy, key information at your finger tips.







***To Make ESS Better***



Deye ESS Facebook



Deye ESS



[www.deyeess.com](http://www.deyeess.com)